


Backhoe loaders drivelines

2WS machine Engine power kW	Front axle	Rear axle	Transmission
From 50 up to 70	26.16	28.32 M 28.40 FR	TLB1
From 71 up to 77	26.22	28.43 M 28.44 FR	TLB1 SPS
From 78 up to 88	26.24	28.50 FR	TLB2

4WS machine Engine power kW	Front axle	Rear axle	Transmission
From 71 up to 77	26.32	26.43 M	TLB1 SPS
From 78 up to 88	26.43	26.43 M	TLB2

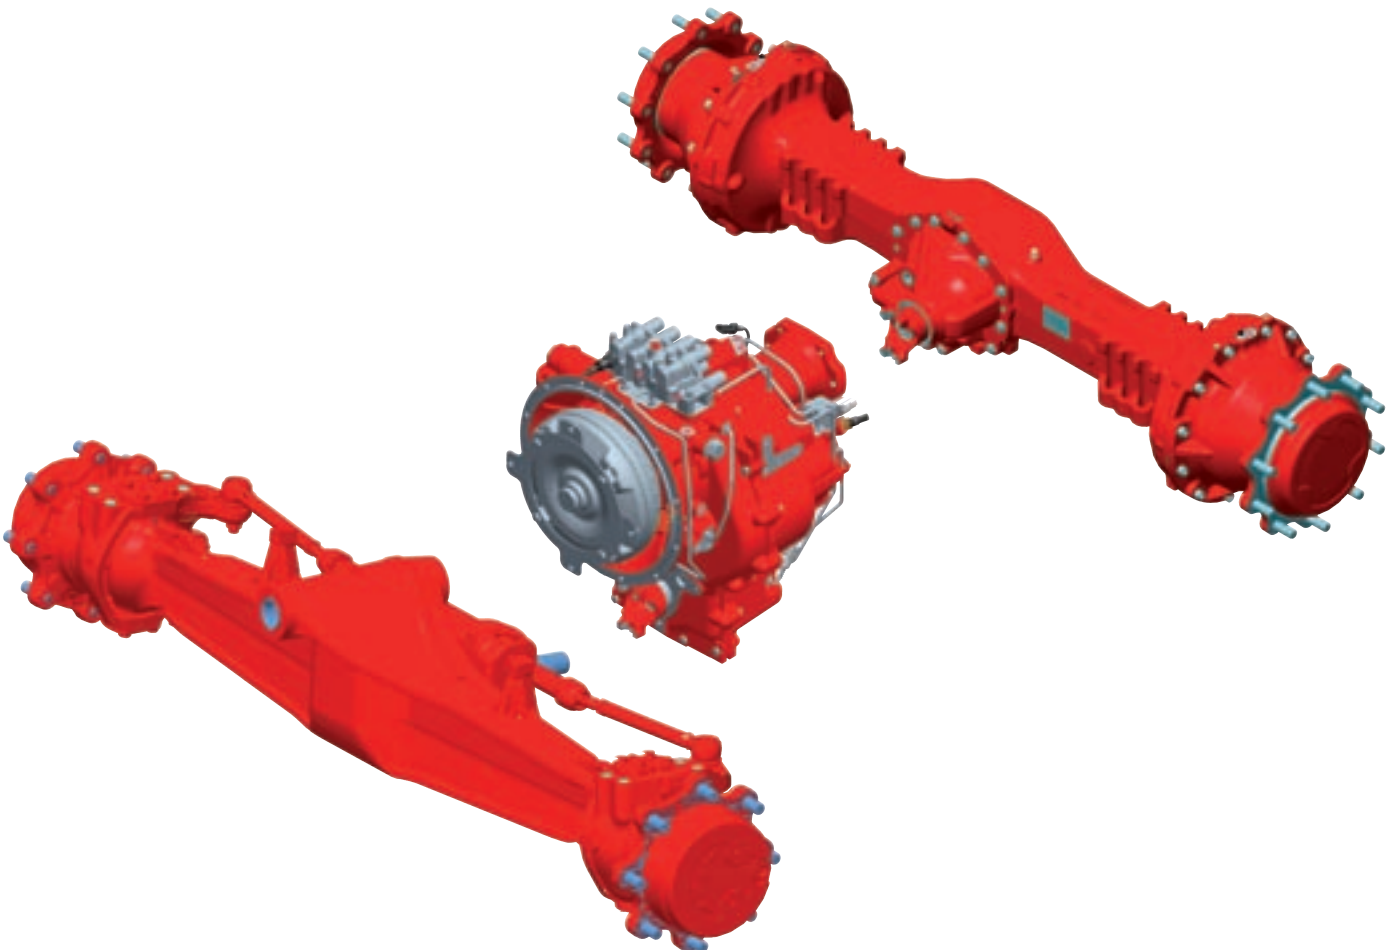

2WS BHL FRONT STEER MODEL

MODEL		26.00	26.16	26.22	26.24
Overall width	mm	1,900 2,000	1,980 2,080	2,080	2,165 2,080
Flange to flange distance	mm	1,820 1,910	1,820 1,920	1,920	1,905 1,920
Wheel mounting dimension	mm	n° 8 5/8"-18 on 203.2 mm ø	n° 8 M18x1.5 on 275 mm ø	n° 8 M18x1.5 on 275 mm ø	n° 8 M18x1.5 on 275 mm ø
Max steering angle		60°	55°	55°	55°
Peak torque	kNm	-	24	31	34
Dynamic load capacity	kN	80	80	95	95
Static load capacity	kN	200	200	237.5	237.5

2WS BHL REAR RIGID MODEL

MODEL		28.40 FR	28.44 FR	28.50 FR	28.32 M	28.43 M
Overall width	mm	1,784	1,930	1,930	1,860 2,006 2,106	1,913 2,060 2,160
Flange to flange distance	mm	1,654	1,800 1,654	1,800	1,654 1,800 1,900	1,654 1,800 1,900
Wheel mounting dimension	mm	n° 10 M22x1.5 on 335 mm ø	n° 10 M22x1.5 on 335 mm ø	n° 10 M22x1.5 on 335 mm ø	n° 10 M22x1.5 on 335 mm ø	n° 10 M22x1.5 on 335 mm ø
Peak torque	kNm	56	62	70	45	60
Dynamic load capacity	kN	75	80	95	75	80
Static load capacity	kN	187.5	200	237.5	187.5	200

4WS BHL MODEL

MODEL		26.32	26.43	26.32 M	26.43 M
Overall width	mm	2,105 2,350	2,105 2,350	2,105 2,350	2,105 2,350
Flange to flange distance	mm	1,900 2,145	1,900 2,145	1,900 2,145	1,900 2,145
Wheel mounting dimension	mm	n° 10 M22x1.5 on 335 mm ø	n° 10 M22x1.5 on 335 mm ø	n° 10 M22x1.5 on 335 mm ø	n° 10 M22x1.5 on 335 mm ø
Max steering angle		45°	45°	45°	45°
Peak torque	kNm	45	60	45	60
Dynamic load capacity	kN	90	100	75	100
Static load capacity	kN	225	250	187.5	250